BC01 - Beam Clamp

Size Range：3/8" and 1/2" or M10 and M12

Material：Ductile iron, hardened steel cup point set screw and locknut

Finish：Black or Galvanized

Service：Structural attachment to top or bottom of metal beams, purlins, channel, or angel iron

Approvals：

- Complies with Federal Specification A-A-1192A (Type 19 & 23) WW-H-171-E (Type 23) and MSS-SP-69 (Type 19 & 23).
- FM approved & UL/ULC Listed

Ordering：Specify Part Number & Finish

Part Number	RS	A	B	Wt.	Set Screw	Max. Rec. Load (lbs)	
	In.	In.	In.	lb	In.	TOP	BOTTOM
BC01-3/8	3/8	3/4	1 1/8	0.31	3/8	500	250
BC01-1/2	1/2	3/4	1 1/4	0.53	1/2	950	760

NOTE：Set screw must be tightened and torqued onto the sloped side of the I-beam.



TOP

Part Number	RS	A	B	Wt.	Set Screw	Max. Rec. Load (N)	
	mm	mm	mm	kg	mm	TOP	BOTTOM
BC01-M10	M10	19	29	0.14	M10	2220	1110
BC01-M12	M12	19	31	0.24	M12	4220	3380

NOTE：Set screw must be tightened and torqued onto the sloped side of the I-beam.

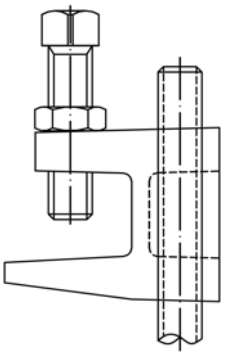

BOTTOM

FM APPROVED

c UL us LISTED